


NEOXPacketLion Product Family

MAXIMISE NETWORK VISIBILITY WITH OUR COST-EFFECTIVE AND INNOVATIVE PACKET BROKER PLATFORM!

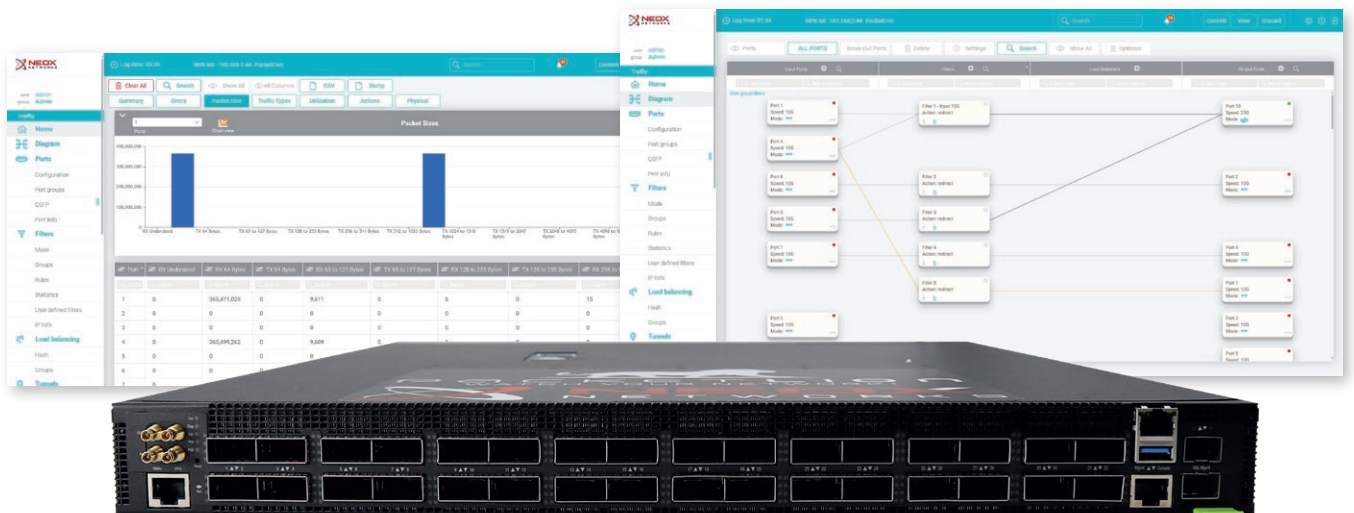

Network packet brokers, also known as data (network) monitoring switches, help you to intelligently manage your passively tapped network data and - thanks to innovative technology - provide the analysis tools with the data packets reliably and in optimised form.

Media type and speed of your network are irrelevant, as these devices are equipped with SFP+/SFP28/QSFP+/QSFP28/QSFP-DD connectors and process the data packets without affecting the active line and redistribute them according to your wishes.

By filtering out the data with hardware based filtering mechanisms prior to rejection, you can, for example, evaluate several 10G lines with existing 1G analysis tools and at the same time reduce the amount of data for trouble-free and reliable analysis. Data that is not of interest is either discarded or sent to other tools for further analysis.



FEATURES

- Flexible port assignment (1:1, N:N, N:1, 1:N)
- Aggregation of 1G, 10G, 25G, 40G, 50G, 100G, 200G and 400G network ports
- Support for filtering rules (MAC, VLAN, IPv4/IPv6, TCP/UDP, DSCP, TCP Flags, MPLS)
- Filtering within a tunnel (GTP, L2TP, MPLS, GRE, etc.)
- Aggregation and regeneration of any network traffic
- Support for User-Defined Filter rules (UDF)
- Multiple management options (CLI, SSH, SNMP V2/V3, WEB UI, Net CONF and REST API)

HIGHLIGHTS

- Line rate performance without packet loss
- Non-blocking backplane architecture with N+1 redundancy
- Clustering of multiple Network Packet Broker systems
- Support for L3GRE tunnelling protocol
- Load distribution based on 5-tuple criteria
- Port Splitting (simplex mode)
- Port Labeling
- Support for Jumbo Frames
- Digital Diagnostics Monitoring (DDM)
- Radius and TACACS+
- Modular through SFP+/SFP28/QSFP+/QSFP28/QSFP-DD Interfaces
- Logging through Syslog and SNMP traps
- N+1 redundant, hot-swap capable fans
- Hot-swap capable, load sharing and redundant AC/DC power supplies
- MPLS stripping, up to 9 labels (on certain models)
- Timestamping (on certain models)
- Packet slicing (on certain models)



Model: NX-PBPL-1L



Model: NX-PBPL-2M



Model: NX-PBPL-2L



Model: NX-PBPL-1S und -1M



Model: NX-PBPL-3XL

USE CASES

Aggregation of TAP/SPAN traffic in a central location to provide data efficiently to security and monitoring tools

Decide for yourself which network traffic you want to forward to which analysis system

Intelligent load distribution of all data traffic according to the capacity of your connected monitoring systems

Regeneration of the data traffic, for example to be able to provide the network data to several security systems in parallel

Layer 2 matrix switch functionality for any interconnection of network data (many to one, one to many, many to many, any to any), easy media conversion through modular design (SFP+/SFP28/QSFP+/QSFP28/QSFP-DD)

Intelligent filter rules allow you to sort out the network data to be analysed without loss or interruption

Enables you to evaluate 10G/25G/40G/50G/100G/200G/400G network lines using 1G/10G/25G/40G/50G/100G monitoring systems

ARTICLE NO.	DIMENSIONS (WxHxD) / WEIGHT	REGULATORY / CE
NX-PBPL-1S	44.30 cm x 4.34 cm x 47.30 cm / 8.95 kg	EMI, CE Mark, FCC Part 15 Class A, VCCI, RoHS-6
NX-PBPL-1M	44.00 cm x 4.40 cm x 54.80 cm / 9.34 kg	EMI, CE Mark, FCC Part 15 Subpart B Class A, VCCI Class A, RoHS 2.0
NX-PBPL-1L	43.84 cm x 4.35 cm x 53.60 cm / 10.00 kg	EMI, CE Mark, FCC Title 47 Part 15 Subpart B Class A, VCCI Class A, RoHS 2.0
NX-PBPL-2M	43.80 cm x 4.35 cm x 51.50 cm / 10.00 kg	EMI, CE Mark, FCC Part 15 Subpart B Class A, VCCI Class A, RoHS-6
NX-PBPL-2L	43.84 cm x 4.35 cm x 51.50 cm / 10.87 kg	EMI, CE Mark, FCC Part 15 Subpart B Class A, VCCI Class A, RoHS 2.0
NX-PBPL-3XL	43.84 cm x 4.31 cm x 53.60 cm / 11.06 kg	EMI, CE Mark, FCC Title 47 Part 15 Subpart B Class A, VCCI Class A, RoHS 2.0

ARTICLE NO.	POWER SUPPLY
NX-PBPL-1S	AC input range: 90~264 VAC at 50-60 Hz, DC input range: -48 to -72 VDC. Maximum power consumption: 282 W
NX-PBPL-1M	AC input range: 90~240 VAC, DC input range: -36 ~ -72 VDC
NX-PBPL-1L	AC input range: 100~240 VAC, DC input range: -36 ~ -72 VDC. Redundant, current sharing, PG
NX-PBPL-2M, NX-PBPL-2L	AC input range: 90~240 VAC at 50-60 Hz, DC input range: -36 to -72 VDC. Maximum power consumption: 550 W
NX-PBPL-3XL	AC input range: 100~240 VAC at 50-60 Hz. redundant, power sharing, hot-swap capable.

ARTICLE NO.	SFP+ PORTS	SFP28 PORTS	QSFP+ PORTS	QSFP28 PORTS	FAN-OUT / BREAK-OUT
NX-PBPL-1S	48x 1G/10G	-	6x 40G	-	24x 10G (via QSFP+)
NX-PBPL-1M	48x 1G/10G	-	-	6x 40G/100G	12x 50G, 24x 10G/25G (via QSFP28)
NX-PBPL-1L	-	48x 1G/10G/25G	-	8x 40G/100G	16x 50G, 32x 10G/25G (via QSFP28)
NX-PBPL-2M	-	-	-	32x 40G/100G	64x 50G, 128x 10G/25G (via QSFP28)
NX-PBPL-2L	-	-	-	32x 40G/100G	64x 50G, 128x 10G/25G (via QSFP28)

ARTICLE NO.	QSFP-DD PORTS	FAN OUT / BREAK OUT
NX-PBPL-3XL	32x 40G/100G/200G/400G	128x 10G/25G/40G/50G/100G/200G (via QSFP-DD)