


NEOXPacketLion NX-PBPL-2L

MAXIMISE NETWORK VISIBILITY WITH OUR COST-EFFECTIVE AND INNOVATIVE 100G PACKET BROKER PLATFORM!

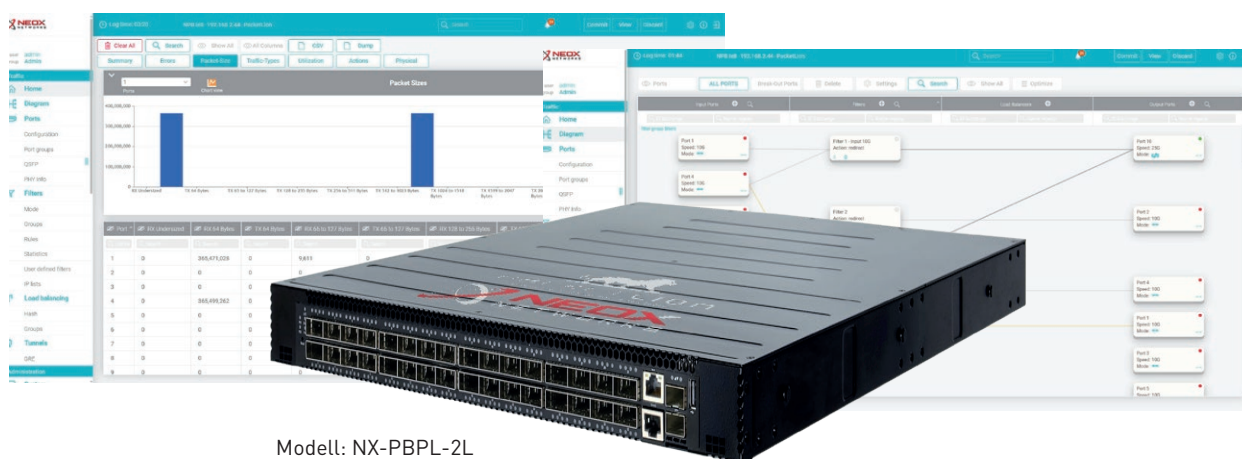

Modell: NX-PBPL-2L

Network Packet Brokers, also called Data (Network) Monitoring Switches, help you to intelligently manage your passively tapped network data and - through innovative technology - provide the analysis tools with the data packets reliably and in optimised form.

Media type and speed of your network do not matter, as these devices are equipped with QSFP28 connectors and process the data packets without affecting the active line and redistribute them according to your wishes.

By filtering out the data with hardware-based filtering mechanisms before it is routed out, this allows you to evaluate multiple 10G lines with existing 1G analysis tools, for example, while reducing the amount of data for hassle-free and secure analysis. Data that is not of interest is either discarded or sent to other tools for further analysis.



FEATURES

Flexible port assignment (1:1, N:N, N:1, 1:N)
Aggregation of 10G, 25G, 40G, 50G and 100G network ports
Support for filter rules (MAC, VLAN, IPv4/IPv6, TCP/UDP, DSCP, TCP Flags, MPLS, Ingress, Egress)
Filtering within a tunnel (GTP, L2TP, MPLS, GRE, VxLAN, etc.)
Digital Diagnostics Monitoring (DDM)
Support for user-defined filter rules (UDF)
Multiple management options (CLI, SSH, SNMP V2/V3, WEB UI, Net CONF and REST API)
Logging through Syslog and SNMP Traps

HIGHLIGHTS

Line rate performance without packet loss
Non-blocking backplane architecture with N+1 redundancy
Stacking of multiple Network Packet Broker systems possible
Support for L3GRE tunnelling protocol
Load distribution based on 5-tuple criteria
Port Splitting (Simplex Mode), Port Labeling
Timestamping
Support for Jumbo Frames
MAC Replace
Radius and TACACS+
Modular due to QSFP28 interfaces
5+1 redundant, hot-swappable fans
Hot-swappable, load-sharing and redundant AC/DC power supplies
MPLS Stripping
Packet Slicing

USE CASES

Aggregation of TAP/SPAN traffic in a central location to efficiently provide security and monitoring tools with the data.

Decide for yourself which network traffic you want to forward to which analysis system.

Intelligent load distribution of all data traffic according to the capacity of your connected monitoring systems.


Use the inline options of our PacketLions and simply connect several tools in series to increase your network security (can be combined with intelligent Load Balancing).

Regeneration of data traffic, for example to be able to provide the network data to several security systems in parallel.

Layer 2 matrix switch functionality for any interconnection of network data (many to one, one to many, many to many, any to any), easy media conversion through modular design (QSFP28).

Intelligent filter rules let you sort out the network data to be analysed without loss and without interruption.

Enables you to evaluate 100G/40G/10G network lines using 100G/40G/10G/1G monitoring systems.

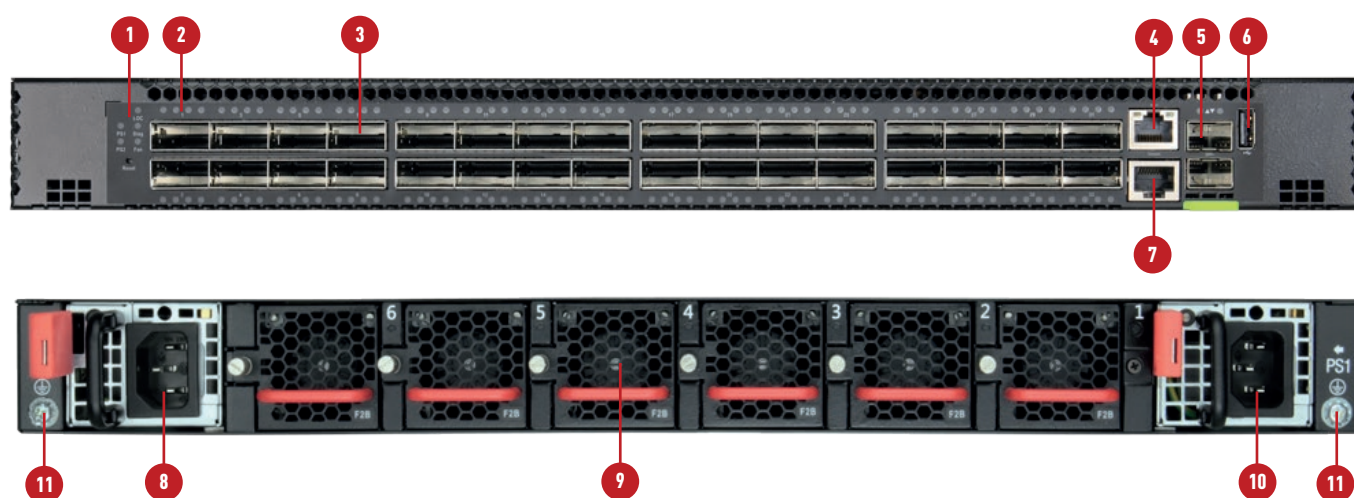

INTERFACES

1	System LEDs	5	1x 10G Management Port*	9	Hot-Swappable 5 + 1 redundant fans
2	Port Indicators	6	USB Storage Port	10	PSU 1
3	32 x 100G QSFP28 Ports	7	Console Port	11	Grounding Point
4	1x RJ45 Management Port*	8	PSU 2		

* Multiple Management IPs possible

DIMENSIONS (WxHxD) / WEIGHT

43.84 cm x 4.35 cm x 51.50 cm / 10.87 kg

REGULATORY / CE

EMI, CE Mark, FCC Part 15 Subpart B Class A, VCCI Class A, RoHS 2.0

POWER SUPPLY

AC input range: 90~240 VAC at 50-60 Hz, DC input range: -36 to -72 VDC. Maximum power consumption: 550 W



ITEM NUMBER	QSFP28 PORTS	FAN-OUT
NX-PBPL-2L	32x 40G/100G	64x 50G, 128x 10G/25G (via QSFP28)