

## Accelerators for Smarter Data Delivery

# NT40E3-4-PTP 4-PORT 10G PCIe GEN3


### 4 × 10 Gbps PACKET CAPTURE AND ANALYSIS

Use cutting-edge network acceleration technology to add real-time line rate performance to your application. Napatech 4-port 10 Gbps accelerators provide full packet capture and analysis of network data at 40 Gbps with zero packet loss. The Napatech accelerator will capture all frames, including erroneous frames normally discarded by standard NICs.

The Napatech accelerator allows you to merge data from ports into a single, time-ordered analysis stream. It supports 1-128 packet streams using intelligent hardware flow distribution to allow your application to scale to higher packet rates with no packet loss. The Napatech accelerator will distribute packets based on flow or on L3/L4 filter criteria.

The 4 GB DDR3 RAM buffer allows buffering packets on the accelerator to prevent packet loss during peak server loads. Packets are hardware timestamped when they arrive at the network ports, ensuring that the timestamp is always reliable.

The accelerator also comes in a NEBS level 3 compliant variant.

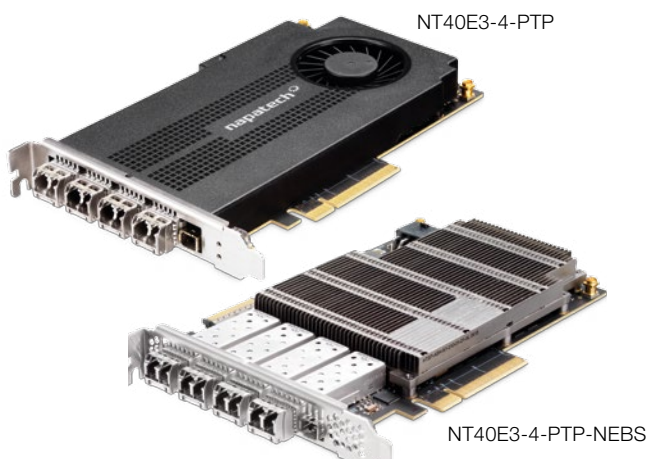

### FEATURE HIGHLIGHTS

- Scalable Pipeline Architecture
- Network ports: 4 × SFP / SFP+ / dual-rate
- Capture of Ethernet LAN: Full 4 × 10 Gbps
- Zero packet loss for all frame sizes
- 4 GB DDR3 RAM buffer (800 ms at 40 Gbps)
- Typical CPU load: < 5% of one core
- Addressing up to 1 TB application buffer memory
- Packet or segment delivery to application
- Hardware accelerated:
  - Multi-port packet merge
  - Load distribution across up to 128 CPU cores
  - 4 ns time-stamping
  - Frame and protocol information
  - Filtering based on e.g. L3/L4 criteria
  - GTP, IP-in-IP, GRE and NVGRE tunneling support
  - Slicing at fixed or dynamic offset
  - RMON1 counters, including jumbo frames
- IEEE 1588-2008 PTP and PPS time synchronization
- OS time synchronization
- Easy-to-integrate API
- Linux and libpcap

### NAPATECH-SUPPORTED APPLICATIONS

Napatech accelerators enable OEM vendors to build high-performance network appliances based on standard servers. Examples of applications include:

- Revenue and services optimization
- Quality of experience optimization
- Financial latency measurement
- Customer experience analysis
- Data loss prevention
- Virtualized activity analysis
- Cyber defense
- Fraud detection and compliance management
- Infrastructure management and security
- Network and application performance
- Troubleshooting and compliance

## SPECIFICATIONS

### GENERAL FEATURES

- Full line-rate processing for all frames from 64 bytes to 10,000 bytes - keep or discard erroneous frames
- IEEE standard: IEEE 802.3 10 Gbps Ethernet support
- Physical interface: 4 × SFP / SFP+ / dual-rate ports
- Supported SFP modules: Multi-mode SX, single-mode LX and ZX, 1000BASE-T or 10/100/1000BASE-T
- Supported SFP+ modules: Multi-mode SR, singlemode LR and ER, 10GBASE-CR
- Supported dual-rate modules: Multi-mode SR and singlemode LR
- Data rate: 4 × 10 Gbps
- Typical CPU load: < 5%
- Time formats: PCAP-ns/-μs and UNIX 10 ns
- Time resolution: 4 ns
- Stratum 3 compliant TCXO
- Pluggable options for IEEE 1588-2008 PTP and PPS time synchronization
- PTP slave in IEEE 1588-2008 default and telecom profiles

### ACCELERATOR SOFTWARE

- Operating systems: Linux
- Napatech API for high performance and advanced features
- libpcap
- IEEE 1588-2008 PTP stack
- SDK tools included in source code for debugging and prototyping and as application examples

### ACCELERATOR HARDWARE

- Bus type: 8-lane 8 GT/s PCIe Gen3
- 4 GB onboard DDR3 RAM
- Flash: Support for two boot images
- Built-in thermal protection
- Physical dimensions: ½-length and full-height PCIe
- Weight excluding SFP+ SR modules:
  - NT40E3-4-PTP: 260 g
  - NT40E3-4-PTP-NEBS: 285 g
- MTBF according to UTE C 80-810:
  - NT40E3-4-PTP: 297,993 hours
  - NT40E3-4-PTP-NEBS: 367,807 hours

- Power consumption including SFP+ SR modules:
  - NT40E3-4-PTP: max 27 Watts
  - NT40E3-4-PTP-NEBS: max 30 Watts

### ENVIRONMENT FOR NT40E3-4-PTP

- Operating temperature: 0 °C to 45 °C (32 °F to 113 °F)
- Operating humidity: 20% to 80%

### ENVIRONMENT FOR NT40E3-4-PTP-NEBS

- Operating temperature: -5 °C to 55 °C (23 °F to 131 °F) measured around the accelerator
- Operating humidity: 5% to 85%
- Altitude: < 1,800 m
- Airflow: ≥ 2.5 m/s
- Operating humidity: 5% to 85%

### REGULATORY APPROVALS AND COMPLIANCES

- PCI-SIG®, NEBS level 3, CE, CB, RoHS, REACH, cURus (UL), FCC, CSA, VCCI, C-TICK, KCC

## COMPANY PROFILE

Napatech is the world leader in data delivery solutions for network management and security applications. As data volume and complexity grow, organizations must monitor, compile and analyze all the information flowing through their networks. Our products use patented technology to capture and process data at high speed and high volume with guaranteed performance, enabling real-time visibility. We deliver data faster, more efficiently and on demand for the most advanced enterprise, cloud and government networks. Now and in the future, we enable our customers' applications to be smarter than the networks they need to manage and protect.

### Napatech. SMARTER DATA DELIVERY

#### EUROPE, MIDDLE EAST AND AFRICA

Napatech A/S  
Copenhagen, Denmark

Tel. +45 4596 1500  
info@napatech.com  
www.napatech.com

#### NORTH AMERICA

Napatech Inc.  
Boston, Massachusetts  
Los Altos, California  
Washington D.C.

Tel. +1 888 318 8288  
info@napatech.com  
www.napatech.com

#### APAC

Napatech China/South Asia  
Taipei City, Taiwan  
Tel. +886 2 28164533 Ext. 319

Napatech Japan K.K.  
Tokyo, Japan  
Tel. +81 3 5326 3374

Napatech Korea  
Seoul, South Korea  
Tel. +82 2 6001 3545

ntapacsales@napatech.com  
www.napatech.com