

Distributed by



sales@neox-networks.com

+49 6103 37 215 910


www.neox-networks.com

# napa:tech;

RECONFIGURABLE COMPUTING

## Link NT20E3 SmartNIC

2X1G/2X10G

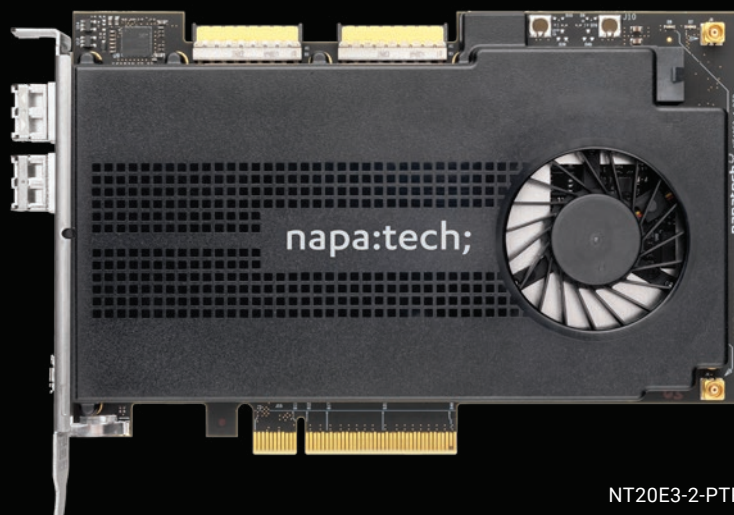

NT20E3-2-PTP

### APPLICATIONS AND SERVICES



Link Capture Software



Suricata



n2disk



Snort



Bro



TRex



Wireshark



+More



Community



Support



Docs



Tutorials

### PACKET CAPTURE AND ANALYSIS

Use cutting-edge network SmartNIC technology to add real-time line-rate performance to your application. The Link NT20E3 SmartNIC provides full packet capture and analysis of network data at 20 Gbps with zero packet loss. The SmartNIC can capture all frames, including erroneous frames normally discarded by standard NICs. The SmartNIC can also be used for in-line application acceleration. The SmartNIC allows you to merge data from ports into a single, time-ordered analysis stream. It supports 1-128 packet streams using intelligent hardware flow distribution to allow your application to scale to higher packet rates with no packet loss. The Napatech SmartNIC will distribute packets based on flow or on e.g. L3/L4 filter criteria.

The 4 GB DDR3 RAM buffer allows buffering packets on the SmartNIC to prevent packet loss during peak server loads. Packets are hardware time-stamped when they arrive at the network ports, ensuring that the time stamp is always reliable. The SmartNIC also comes in a NEBS level 3 compliant variant.

# HIGHLIGHTS, APPLICATIONS AND SPECIFICATIONS

## Feature Highlights

- Network ports: 2 × SFP+
- Capture of Ethernet traffic: Full 2 × 10/1 Gbps
- Zero packet loss for all frame sizes
- 4 GB DDR3 RAM buffer (1600 ms at 20 Gbps)
- Typical CPU load: < 5% of one core
- Addressing up to 1 TB application buffer memory
- Packet or segment delivery to application
- Hardware-accelerated:
  - Multi-port packet merge
  - Load distribution across up to 128 CPU cores
  - 1 ns time stamp resolution
  - Frame and protocol information
  - Filtering based on e.g. L3/L4 criteria
  - GTP, IP-in-IP, GRE and NVGRE tunneling support
  - IP fragment handling
  - Slicing at fixed or dynamic offset
  - Deduplication in Hardware
  - RMON1 counters, including jumbo frames
- IEEE 1588-2008 PTP and PPS time synchronization
- OS time synchronization
- Easy-to-integrate API
- Linux, Windows, libpcap, WinPcap and DPDK

## Napatech-supported Applications

Napatech SmartNICs enable OEM vendors to build high-performance network appliances based on standard servers. Examples of applications include:

- Revenue and services optimization
- Quality of experience optimization
- Financial latency measurement
- Customer experience analysis
- Data loss prevention
- Virtualized activity analysis
- Cyber defense
- Fraud detection and compliance management
- Infrastructure management and security
- Network and application performance
- Troubleshooting and compliance

## General Features

- Full line-rate processing for all frames from 64 bytes to 10,000 bytes
  - keep or discard erroneous frames
- IEEE standard: IEEE 802.3 10/1 Gbps, 100 Mbps Ethernet support
- Network interface: 2 × SFP+ ports
- Supported SFP modules: 1000BASE-SX, 1000BASE-LX, 1000BASE-ZX, 1000BASE-T or 100/1000BASE-T
- Supported SFP+ modules: Multi-mode SR, single-mode LR and ER, 10GBASE-CR
- Supported dual-rate SFP+ modules: Multi-mode SR and single-mode LR
- Data rate: 2 × 10/1 Gbps

- Typical CPU load: < 5%
- Time formats: PCAP-ns/-µs and UNIX 10 ns/1 ns
- Time stamp resolution: 1 ns
- Stratum 3 compliant TCXO
- Pluggable options for IEEE 1588-2008 PTP and PPS time synchronization
- PTP slave in IEEE 1588-2008 default, power, enterprise and telecom profiles

## SmartNIC Software

- Operating systems: Linux, Windows
- Napatech API for high performance and advanced features
- libpcap, WinPcap and DPDK
- IEEE 1588-2008 PTP stack
- SDK tools included in source code for debugging and prototyping and as application examples

## SmartNIC Hardware

- Bus type: 8-lane 8 GT/s PCIe Gen3
- 4 GB onboard DDR3 RAM
- Flash: Support for two boot images
- Built-in thermal protection
- Physical dimensions: ½-length and full-height PCIe
- Weight excluding pluggable modules:
  - NT20E3-2-PTP: 260 g
  - NT20E3-2-PTP-NEBS: 285 g
- MTBF according to UTE C 80-810:
  - NT20E3-2-PTP: 297,993 hours
  - NT20E3-2-PTP-NEBS: 367,807 hours
- Power consumption including SFP+ SR modules:
  - NT20E3-2-PTP: max 27 Watts
  - NT20E3-2-PTP-NEBS: max 27 Watts

## Environment for NT20E3-2-PTP

- Operating temperature: 0 °C to 45 °C (32 °F to 113 °F)
- Operating humidity: 20% to 80%

## Environment for NT20E3-2-PTP-NEBS

- Operating temperature: -5 °C to 55 °C (23 °F to 131 °F) measured around the SmartNIC
- Operating humidity: 5% to 85%
- Altitude: < 1,800 m
- Airflow: ≥ 2.5 m/s
- Operating humidity: 5% to 85%
- Altitude: < 1,800 m
- Airflow: ≥ 2.5 m/s

## Regulatory Approvals and Compliances

- PCI-SIG®, NEBS level 3, CE, CB, RoHS, REACH, cURus (UL), FCC, ICES, VCCI, RCM, KCC

## NAPATECH RECONFIGURABLE COMPUTING

NAPATECH.COM

Disclaimer: This document is intended for informational purposes only. Any information herein is believed to be reliable. However, Napatech assumes no responsibility for the accuracy of the information. Napatech reserves the right to change the document and the products described without notice. Napatech and the authors disclaim any and all liabilities. Napatech is a trademark used under license by Napatech A/S. All other logos, trademarks and service marks are the property of the respective third parties. Copyright © Napatech A/S 2019. All rights reserved.