

# NEOXPacketRaven Modular Fiber TAPs

## QUICK USER GUIDE



Fiber TAPs are passive mirroring devices for secure and reliable tapping of network data in optical networks.

These TAPs are looped into the fiber optic line to be monitored and route all data traffic without interruption.

Our optical TAPs do not require power, are purely passive components and therefore cannot be detected in the network without expensive measurement equipment. Hackers and other attackers thus have no chance, and since the integrity of the outgoing data remains unaltered due to this tapping method.

But how does it work? Technically, optical TAPs split the light as it arrives and divide it into two fibers. In this case, a large part of the splitted signal remains on the actual network link and the rest is output to a monitoring port for external recording. Highly sensitive prisms are used to couple out the light wave.

Since optical Fiber TAPs are protocol-independent, these devices can be installed in a variety of network media. Thus, these TAPs are available for multimode and also singlemode network types and wavelength as well as network speed do not matter. The data is routed out transparently and loss-free without interfering with the active line.

PacketRaven Fiber TAPs are designed for data centers and allow you to equip up to 30 network segments with LC TAPs or 10 network segments with MTP<sup>®</sup>/MPO-based TAPs using our innovative, modular 1U chassis. They support network speeds from 100Mbps up to 400Gbps.

Without risk you get permanent network access and provide your monitoring and security tools with 100% reliable network data without introducing a single point of failure.

	Up to 400 Gbps
	Full Network Transparency
	No Impairment of Data Traffic
	100% Network Data
	Invisible for Attackers
	No Network Access via Monitoring Port
	Plug-n-Play
	No Power Supply necessary
	Various Split Ratios
	Scalable and Modular
	Made in Germany

## 1. Highlights

- Supported network speeds: 100M, 1G, 10G, 25G, 40G, 50G, 100G, 200G, and 400G
- Alternative to SPAN ports – mirrors 100% of traffic including FCS/CRC errored packets that may be dropped by SPANs
- Invisible in the network, no IP address, no MAC address, cannot be hacked
- No power source necessary, 100% passive
- Guaranteed no packet loss
- Plug & play, simple installation without configuration
- Scalable and modular, supports installation of all TAP models regardless of media type, speed and connector type
- Split ratios of 50:50, 60:40, 70:30, 80:20 and 90:10 are supported
- Does not cause additional latency
- Designed, assembled, certified and tested in Germany


## 2. How does a Split Ratio work?

Due to its splitting technique using a prism, attenuations naturally occur which must be taken into account when selecting the TAP.

Fiber TAPs are available in 5 different variations and differ in their split ratio. Available are devices with the "split ratio" 50:50, 60:40, 70:30, 80:20, 90:10.

A typical attenuation value of a 70:30 Fiber TAP is about 2dB on the network side and 6dB on the monitoring ports.

Here you can see an example of a 70/30 Split Ratio:

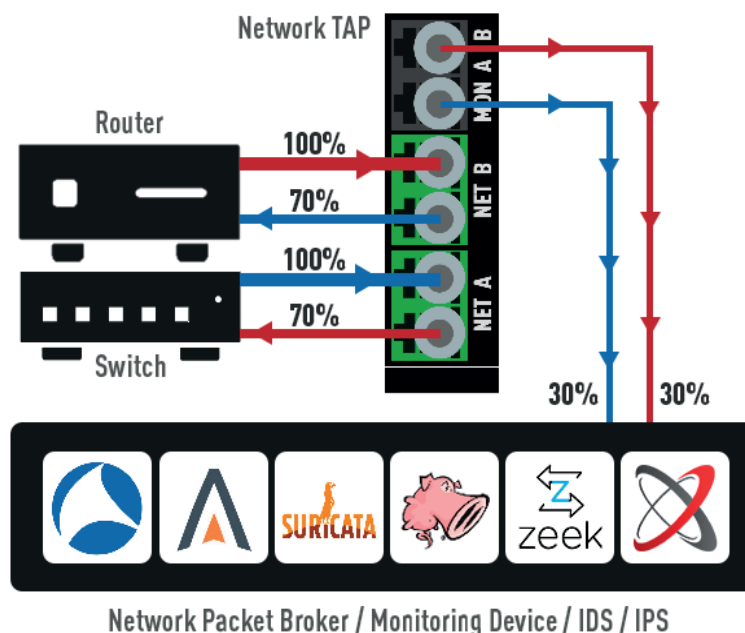

## 3. Connector Colours and Fiber Types

The colours of our connectors allow you to identify the fibre types for which the respective connector is intended:

	OS2 = Blue		OM4 = Violet
	OM3 = Aquamarine		OM5 = Lime Green

## 4. Connections


### 4.1 Singlemode & Multimode Fiber TAPs with LC > LC Connectors

Here is an excerpt of the standards our LC **Singlemode** Fiber TAPs are supporting:\*

- 100BASE-FX
- 100BASE-EX
- 100BASE-LX
- 100BASE-LX10
- 100BASE-ZX
- 10GBASE-ER
- 10GBASE-EW
- 10GBASE-LR
- 10GBASE-LRM
- 10GBASE-LW
- 10GBASE-ZR
- 10GBASE-ZW
- 25GBASE-ER
- 25GBASE-LR
- 40GBASE-ER4
- 40GBASE-FR
- 40GBASE-LR4
- 40GBASE-LX4/LM4
- 50GBASE-ER
- 50GBASE-FR
- 50GBASE-LR
- 100GBASE-DR
- 100GBASE-ER4
- 100GBASE-FR1
- 100GBASE-LR1
- 100GBASE-LR4
- 200GBASE-ER4
- 200GBASE-FR4
- 200GBASE-LR4
- 400GBASE-FR4
- 400GBASE-FR8
- 400GBASE-LR4-6
- 400GBASE-LR8
- 400GBASE-ZR

Here is an excerpt of the standards our LC **Multimode** Fiber TAPs are supporting:\*


- 1000BASE-SX
- 10GBASE-SR
- 10GBASE-SW
- 25GBASE-SR
- 50GBASE-SR

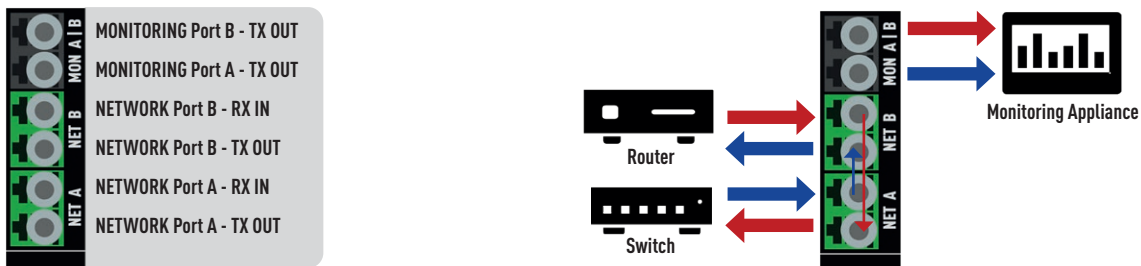

### 4.2 Multimode Fiber TAP with MTP®/MPO > MTP®/MPO Connectors

Here is an excerpt of the standards our MTP®/MPO Multimode Fiber TAPs are supporting:\*


- 40GBASE-SR4
- 100GBASE-SR2
- 100GBASE-SR4
- 200GBASE-SR4
- 400GBASE-SR4.2

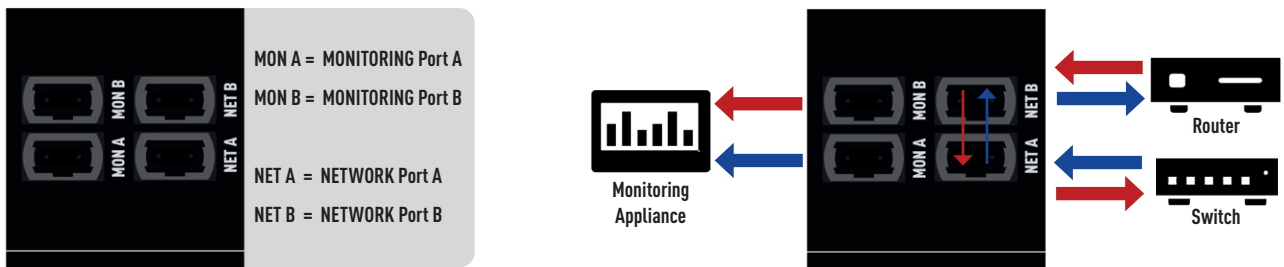

### 4.3 Multimode Fiber TAP with MTP®/MPO > LC Connectors

Here is an excerpt of the standards our MTP®/MPO Multimode Fiber TAPs are supporting:\*

- 40GBASE-SR4
- 100GBASE-SR2
- 100GBASE-SR4
- 200GBASE-SR4
- 400GBASE-SR4.2

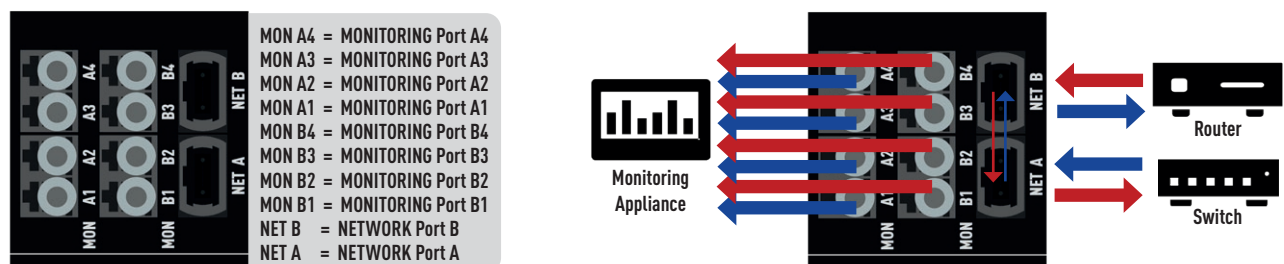

\* If you are considering using a standard not listed here, please contact us.

## 5. Technical Specifications

SUPPORTED MEDIA TYPE		SPECIFICATIONS	
Multimode 850 nm / 1300 nm	OM1, OM2	Height x Width x Depth (Chassis)	4.80 cm x 19.40 cm x 42.50 cm
Multimode 850 nm	OM3, OM4	Operating Temperature	-40°C – +85°C
Multimode 850 nm – 950 nm	OM5	Humidity	5% – 85%
Singlemode 1310 nm / 1550 nm	OS1, OS2	Reliability	GR-1221-CORE

MAXIMUM INSERTION LOSS			
Split Ratio (more on request)	50:50	60:40	70:30
Multimode OM1, OM2	4.0 dB / 4.0 dB	3.0 dB / 5.0 dB	2.4 dB / 6.3 dB
Multimode OM3, OM4, OM5	3.8 dB / 3.8 dB	2.8 dB / 4.8 dB	2.2 dB / 6.1 dB
Singlemode OS1, OS2	3.4 dB / 3.4 dB	2.5 dB / 4.5 dB	1.7 dB / 5.8 dB

## 6. Available TAPs & Accessories

PACKETRAVEN MULTIMODE TAP OPTIONS							
ARTICLE NO.	NETWORK	FIBER TYPE	WAVE-LENGTH	CONNECTOR NET. / MON.		SPLIT RATIOS	SLOTS NEEDED
PRM-OM3-LL-*	1G/10G/25G/50G	OM3	850 nm	LC	LC	50:50, 60:40, 70:30	1
PRM-OM4-LL-*	1G/10G/25G/50G	OM4**	850 nm	LC	LC	50:50, 60:40, 70:30	1
PRM-OM5-LL-*	1G/10G/25G/50G	OM5	850 nm- 950 nm	LC	LC	50:50, 60:40, 70:30	1
PRM-OM4-MM-*	40G/100G/200G/400G	OM4**	850 nm	MTP	MTP	50:50, 60:40, 70:30	3
PRM-OM5-MM-*	40G/100G/200G/400G	OM5	850 nm- 950 nm	MTP	MTP	50:50, 60:40, 70:30	3
PRM-OM4-ML-*	40G/100G/200G/400G	OM4**	850 nm	MTP	LC	50:50, 60:40, 70:30	3
PRM-OM5-ML-*	40G/100G/200G/400G	OM5	850 nm- 950 nm	MTP	LC	50:50, 60:40, 70:30	3

\* Basic article number plus "-50" for a 50:50 split ratio, "-60" for 60:40 and "-70" for 70:30 \*\* OM3 compatible

PACKETRAVEN SINGLEMODE TAP OPTIONS							
ARTICLE NO.	NETWORK	FIBER TYPE	WAVE-LENGTH	CONNECTOR NET. / MON.		SPLIT RATIOS	SLOTS NEEDED
PRM-OS2-LL-*	100M/1G/10G/25G/40G/50G/100G/200G/400G	OS2	1310 nm / 1550 nm	LC	LC	50:50, 60:40, 70:30	1

\* Basic article number plus "-50" for a 50:50 split ratio, "-60" for 60:40 and "-70" for 70:30

PACKETRAVEN CHASSIS OPTION	
PRM-CH-1U30	Supports the installation of up to 30 TAP modules



V17082021